

# LEDDriving PX-5

LED daytime running light for retrofit



**LED pixel technology**

Dynamic appearance thanks to faceted optic and dotted pixel technology



**DRL**

LED daytime running light compatible with a wide range of car models and easy to install



**5200 K**

For drivers who want to increase visibility during the day



**Stylish highlights for your car**

LEDDriving PX-5 serves as a high performance and energy-efficient daytime running light for retrofitting on your vehicle. With its patterned diode design of five LEDs, the LEDDriving PX-5 gives your vehicle a modern and stylish look. This daytime running light system is compatible with a wide range of vehicle models and is easy to install. The careful design of the LEDDriving system ensures a horizontal tilt of 10 degrees. In addition, the left-hand and right-hand lamps can be switched, thus making installation uncomplicated. Furthermore, the high color temperature of 5,200 Kelvin and long life of up to 5,000 hours provide endless driving pleasure with LEDDriving PX-5. OSRAM provides a 3-year guarantee for this product. Note: LEDDriving PX-5 is certified according to ECE, SAE and CCC regulations (ECE E4 approval; ECE R87 approval).

# Product datasheet

## Technical data

### Product information

Order reference	LEDDL301
-----------------	----------


### Electrical data

Nominal voltage	13.2 V
Nominal wattage	12.5 W

### Photometrical data

Color temperature	5200 K
Luminous flux	300 lm

### Dimensions & weight

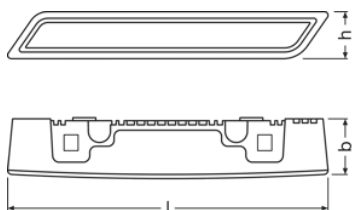

Length	160.0 mm
Product weight	552.00 g
Width	30.0 mm
Height	23.0 mm

### Lifespan

Guarantee	3 years
-----------	---------

### Additional product data

Connector to lamp	Wire Kit
-------------------	----------

### Capabilities

Technology	LED
------------	-----

### Certificates & standards

## Product datasheet

Standards	ECE R87
Approval marks – approval	E4 approval

### Country specific categorizations

Order reference	LEDDRL301
-----------------	-----------

### Logistical data

Commodity code	85122000900
----------------	-------------

### Environmental information



Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	03-07-2024
Primary Article Identifier	4052899170766
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	24fd4b7d-c774-46f3-9b44-7c1767b813ea

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899170766	LEDriving PX-5	Folding carton box 1	286 mm x 79 mm x 203 mm	4.59 dm <sup>3</sup>	762.00 g
4052899170773	LEDriving PX-5	Shipping carton box 5	444 mm x 305 mm x 231 mm	31.28 dm <sup>3</sup>	4349.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Download Data

File
 User instruction 336028_LED Daytime Running Light Kit LEDDRL301 (User Manual)
 User instruction 501779_LED Daytime Running Light Kit LEDDRL301 CL15 (User Manual)

### Legal advice

## Product datasheet

ECE E4 approval

ECE R87 approval

### References / Links

Guarantee terms are available at [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

### Application advice

For more detailed application information and graphics please see product datasheet.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



# OSRAM