

# BATTERYcharge 908



**Start/Stop compatible**

Suitable for vehicles with Start/Stop system



**Winter mode**

Protects batteries in cold temperatures



**9-stage charging cycle**

For easy charging of Lead Acid/AGM batteries



**Smart battery charger and maintainer with multi-stage charging cycle**

The OSRAM BatteryCharger 908 is a 8A smart charger and battery maintainer for 12V and 24V vehicles including most cars, vans and small trucks. Maintains and charges a vehicle's battery through a 7 stage charging cycle at the touch of a button for Lithium batteries, with only a 9-stage cycle of Lead Acid/AGM batteries. Includes a backlit LCD digital display to keep things easy even in low light. A host of safety features including reverse polarity and short-circuit protection, keeps both the user and the vehicle safe. Be sure that the charger is maintaining your car battery as it automatically changes to long-term maintenance mode when the vehicle's battery is full.

# Product datasheet

## Technical data


### Product information

Application (Category and Product specific)	Smart battery charger
---------------------------------------------	-----------------------

### Electrical data

Charge Rate (Up to)	8.0 A
Maintenance Charge (up to)	4.0 A
Max battery capacity	150 Ah
Min battery capacity	70 Ah

### Dimensions & weight

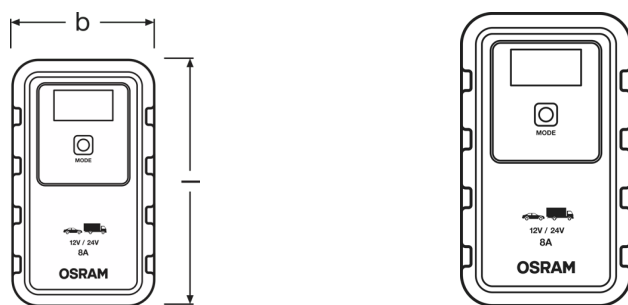

Length	185.0 mm
Width	106.0 mm
Height	70.0 mm
Power Cable Length	1.5 m
Clamps Cable Length	1.5 m

### Additional product data

Recommended to Use With	Motorcycle, Car, SUV, Van, Small Truck
Stages: Lead, AGM, EFB	9
Stages: Lithium	7
Battery Connection	O-rings, Crocodile Clamps

### Environmental information

<b>Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)</b>	
Date of Declaration	07-03-2024
Primary Article Identifier	4052899620544

## Product datasheet

<b>Candidate List Substance 1</b>	Lead
<b>CAS No. of substance 1</b>	7439-92-1
<b>Safe Use Instruction</b>	The identification of the Candidate List substance is sufficient to allow safe use of the article.
<b>Declaration No. in SCIP database</b>	39a90b38-e51d-44ff-8a96-fe9eea625c68



Detail



Detail






Detail

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899620544	BATTERY charge 908	Folding carton box 1	145 mm x 128 mm x 272 mm	5.05 dm <sup>3</sup>	1041.00 g
4052899620629	BATTERY charge 908	Shipping carton box 4	314 mm x 280 mm x 334 mm	29.37 dm <sup>3</sup>	4740.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Download Data

File
 User instruction BATTERYcharge
 Movie application BatteryCharge How to Video (EN)
 Product movie OSRAM BATTERYcharge OEBCS908 Product Video (EN)

### Legal advice

## Product datasheet

\*for precise conditions please refer to:

[www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

Application advice:

For more detailed application information and graphics please see product datasheet.

### **Application advice**

For more detailed application information and graphics please see product datasheet.

### **Disclaimer**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

The OSRAM logo is displayed in a bold, orange, sans-serif font.