

# BATTERYstart 300

## Jump starters




### Engine size compatibility

To jump start 12 V vehicles with up to 6 L petrol engines and 3 L diesel engines



### Battery Power

Powerful 13,000 mAh Lithium Cobalt battery



### Powerbank-Function

Charging electronic devices including smart phones and tablets



### Compact and powerful lithium jump starter with power bank feature

The OSRAM BATTERYstart300 compact Lithium Cobalt LiCoO<sub>2</sub> jump starter for small to medium 12V vehicles up to 6L petrol engines and 3L diesel engines. Smaller in size than most typical jump starters, the BATTERYstart300 is a compact solution without compromising on power. It includes intelligent safety clamps to keep the jump starter, user and vehicle safe with reverse-polarity, anti-spike and short circuit protection. Comes with a bright LED light and a power bank feature, which allows you to charge electronic devices on the go – just connect a USB charger and the power bank will kick in.

# Product datasheet

## Technical data


### Product information

|  |        |
|--|--------|
| Efficiency                             | Better |
| Recommended Petrol Engine size (up to) | 6 l    |
| Recommended Diesel Engine size (up to) | 3 l    |
| USB sockets 2.1A                       | 2      |
| 12V Power socket connection            | n/a    |

### Electrical data

|               |      |
|---------------|------|
| Cranking Amps | 300  |
| Peak Amps     | 1500 |

### Dimensions & weight

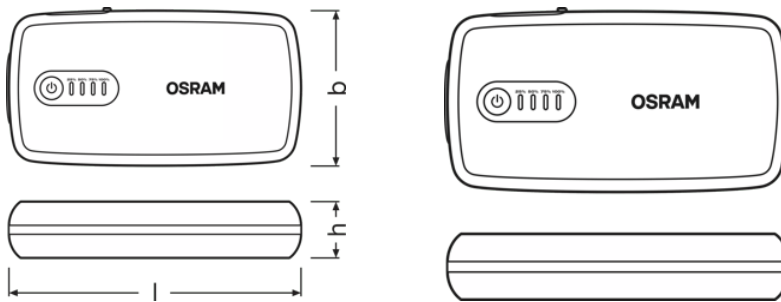

|        |          |
|--------|----------|
| Length | 168.0 mm |
| Width  | 88.0 mm  |
| Height | 33.0 mm  |

### Additional product data

|                     |           |
|---------------------|-----------|
| Type of Battery     | LiCoO2    |
| Battery Capacity    | 13000 mAh |
| Charging Type       | Micro-USB |
| Charging time       | 3 h       |
| Power bank function | Yes       |

### Environmental information

|   |            |
|---|------------|
| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |            |
| Date of Declaration   | 07-03-2024 |

## Product datasheet

|   |  |
|---|--|
| <b>Primary Article Identifier</b>       | 4052899620483  |
| <b>Candidate List Substance 1</b>       | Lead   |
| <b>CAS No. of substance 1</b>           | 7439-92-1  |
| <b>Safe Use Instruction</b>             | The identification of the Candidate List substance is sufficient to allow safe use of the article. |
| <b>Declaration No. in SCIP database</b> | ada11f03-1c52-4c49-9f3f-4ab9687039c7   |



Detail



Detail



Detail



Detail

## Logistical Data




| Product code  | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume                | Gross weight |
|---------------|---------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4052899620483 | BATTERY start 300   | Folding carton box 1         | 214 mm x 132 mm x 96 mm              | 2.71 dm <sup>3</sup>  | 848.00 g     |
| 4052899620568 | BATTERY start 300   | Shipping carton box 4        | 282 mm x 232 mm x 224 mm             | 14.65 dm <sup>3</sup> | 3752.00 g    |

## Product datasheet

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Download Data

| File  |  |
|---|--|
|  | User instruction<br>BATTERYstart                           |
|  | Movie application<br>BatteryStart How to Video (EN)        |
|  | Product movie<br>OSRAM BATTERYstart 300 Product Video (EN) |

#### Application advice:

For more detailed application information and graphics please see product datasheet.

#### Application advice

For more detailed application information and graphics please see product datasheet.

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

# OSRAM