
OSRAM

LEDinspect WEARABLE NECKLIGHT



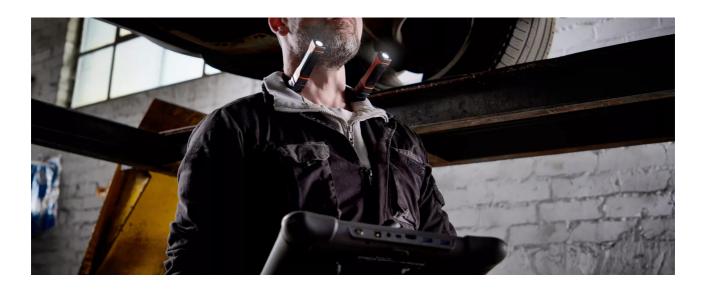

Detachable Torches

High flexibility - can be placed around the neck, on the head, in the hand or on a magnetic surface



Up to 265 lm (high) & 130 lm (low)

Two light functions: Up to 265 lm (high) and up to 130 lm (low)



Approx. 1.5 hours charging time

With a charging time of only approx. 1.5 hours, this OSRAM light is quickly ready for use again



2-year OSRAM Guarantee*

Systematic quality assurance measures underpin the premium workmanship and functionality of our products. Innovative technology and excellent quality really pay dividends for our customers.

Product family datasheet



Light is versatile

This rechargeable neck light with two individually detachable torches from OSRAM is perfect for professional and private use. With two light functions up to 265lm (high), 130lm (low) and an adjustable 90 degree angle, this offers different setting options for a variety of tasks. The LEDinspect Wearable Neck Light is particularly impressive with its great flexibility - it can be used around the neck, on the head, in the hand or on a magnetic surface. The rechargeable battery allows up to 3 hours of operation at high power or up to 4.5 hours at low power and with a charging time of only about 1.5 hours, this OSRAM lamp is also quickly ready for use again. A USB Micro B charging cable with two connections for the individual lamps to charge the lithium battery is included. In accordance with protection class IP54, this lamp has protection against the ingress of dust particles and against splashing water and has been tested for impact resistance in accordance with IK07. With a weight of only 115g and the flexible design, the product is easy to store and transport and is therefore ideal as a light for handicraft work, craft activities, car repairs and in everyday life. OSRAM also provides a 2-year guarantee* *For precise conditions please refer to: www.osram.com/amguarantee

Product family datasheet

Technical data

	ı		ı		I			
	Product informa	Product information		General Product Information		Electrical Data		
Product description		Application (Category and Product specific)		Global order reference		age	Nominal voltage	
INSPECTION LAMP	LED inspection l	ights	LEDIL413		1 W		3.7 V	
	Photometric Dat	:a				Physica Dimens	al Attributes & sions	
Product description	Color temperatu	Color temperature		Nominal luminous flux		Produc	Product weight	
INSPECTION LAMP	6500 K	6500 K		265 lm White		115.00 g		
							LED module information	
Product description	Length		Width		Height		Number of LEDs per module	
INSPECTION LAMP	158.0 mm		25.0 mm		150 mm		1+1	
	Colors & materia	Colors & materials		Lifetime Additional product data Data				
Product description	Base color	Base color		Type of I	Type of Battery		Number of included batteries	
INSPECTION LAMP	Black / Orange		2 years	Recharge	eable	1		
		Certific standa	ates & rds	Logistical data		Environmental & Regulatory Information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACh)		
Product description	Technology	IK Clas	S	Watt h	our per battery	Candid substar		
INSPECTION LAMP	LED	IK07		2.96		Lead		

Product description	CAS No. of substance	Safe use instruction	Declaration no. in SCIP database
INSPECTION LAMP	7439-92-1	The identification of	9b7cd37b-d0e8-
		the Candidate List	4a84-abf2-
		substance is	d10e9bfc7dfe
		sufficient to allow	
		safe use of the	
		article.	

Product family datasheet

Legal advice

Application advice: For more detailed application information and graphics please see product datasheet and the user instruction.* for precise conditions please refer to:

www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.